

ALSIPACK® Lining System

Refractory Ceramic Fiber Lining System free from anchors


ALSIPACK®		1260	1430
Classification Temperature	°C	1260	1430

Average cold face results as function of temperature with Ta = 20°C calm air (0.5 m/sec) ε= 0.85

150 Kg / m ³	1150	1150	1150	1260	1260	1430	1430
Hot face T _h	600°C	700°C	800°C	900°C	1000°C	1100°C	1200°C
75 mm	76°C	90°C	104°C	122°C	-	-	-
100 mm	67°C	79°C	92°C	105°C	121°C	-	-
150 mm	52°C	61°C	73°C	83°C	97°C	113°C	-
200 mm	45°C	53°C	62°C	72°C	83°C	98°C	115°C
250 mm	42°C	50°C	58°C	66°C	77°C	89°C	102°C
300 mm	40°C	45°C	51°C	57°C	66°C	78°C	90°C

Sizes:	Length (mm)	Width (mm)	Thicknesses (mm)
	610	25	75 to 300 mm

ALSIPACK® is delivered together with its exclusive fixing system

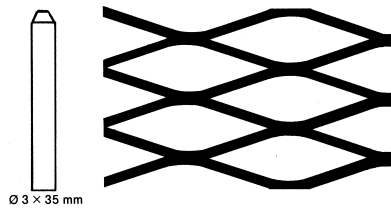

The above data are given in good faith and refer to internal standard test procedures based on internationally recognized testing methods; they are subjected to normal fluctuation during the production process. No warranty are herewith given regarding specific applications without our prior written approval. Our data sheets cannot be used for technical specifications purposes without our authorization. All right reserved – Promat is a registered trademark.

